


SUPER CARRY



Major Equipment

- Front mud flaps / Front 2-speed wipers / Spare tyre and wheel /
- Rope hooks on tailgate x 3, on side panels x 8 (One side x4) / Locking fuel cap /
- 3-spoke steering wheel / Rear window with slide opening and closing function /
- Front map light (2-position) / Sun visors (Driver's side with ticket holder and passenger's side) /
- Assist grips / Bottle holder / 12V accessory socket / Locking glove box /
- Driver's seat slide function (7-position) / 3-point ELR front seatbelts /


Dimensions

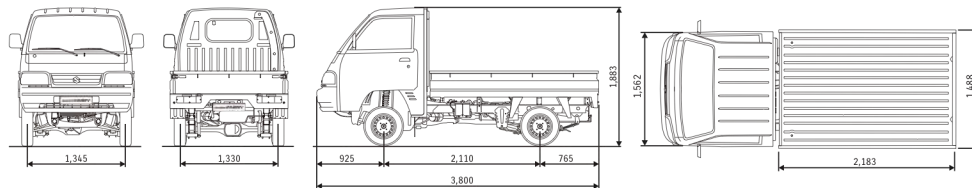

Exterior Colours



Superior White (26U)



Silky Silver Metallic (Z2S)

Suzuki's "Way of Life!" is the heart of our brand - every Suzuki vehicle, motorcycle and outboard motor is built to create excitement so customers can enjoy everyday life.



Vehicles shown in this leaflet are fitted with E08A diesel engine

Standard and optional equipment available may vary for individual markets. Please enquire at your dealers, as specifications and illustrations may refer to models not available in your region. SUZUKI MOTOR CORPORATION reserves the right to change, without notice, prices, colours, materials, equipment, specifications and models, and also to discontinue models.

All photographs in this leaflet were taken with relevant permission. Images of the vehicles without number plates on public roads are composite photos.

Major Specifications			
Steering		LHD	
Drive system		2WD	
Engine		Diesel	Petrol
		0.8 DDIS	1.2
Body type	Truck	Chassis cab	Truck
	Dimensions		
Overall length	mm	3,800	3,785
Overall width	mm		1,562
Overall height	mm		1,883
Wheelbase	mm		2,110
Front overhang	mm		925
Rear overhang	mm	765	690
Tread	Front	mm	1,345
	Rear	mm	1,330
Minimum turning radius	m		4.3
Cargo bed length	mm	2,183	-
Cargo bed width	mm	1,488	-
Cargo bed height	mm	300	-
Minimum ground clearance	mm		175
Capacities			
Seating capacity	persons	2	
Fuel tank capacity	litres	30	
Engine			
Type		E08A	G12B
Number of cylinders		2	4
Number of valves		8	16
Piston displacement	cm ³	793	1,196
Bore x stroke	mm	77x85.1	71x75.5
Compression ratio		15.1	10.0
Maximum output	kW/rpm	24/3,500	54/6,000
Maximum torque	N-m/rpm	75/2,000	101/3,000
Fuel distribution		Direct injection	Multipoint injection
Transmission			
Type		5MT	
Gear ratio	1st	6.329	4.425
	2nd	2.745	2.304
	3rd	1.805	1.674
	4th	1.264	1.264
	5th	1.000	1.000
	Reverse	5.151	5.151
Final gear ratio		4.100	3.727
Chassis			
Steering		Rack & Pinion	
Brakes	Front	Ventilated disc	
	Rear	Drum, leading & trailing	
Suspension	Front	MacPherson strut with coil spring	
	Rear	Rigid axle with leaf spring	
Tyres		155R13LT8PR	
Weights			
Kerb weight	kg	865	765
Maximum payload	kg	735	835
Gross vehicle weight	kg		1,600



SUZUKI MOTOR CORPORATION

300 Takatsuka-cho, Minami-ku, Hamamatsu-shi, Shizuoka 432-8611 Japan
www.globalsuzuki.com



SHALIMAR TRADING
SINCE 2003

SUPER CARRY LEAFLET
99999-B8X01-M11 1609


SUPER CARRY




Way of Life!



Power, now in your hands.

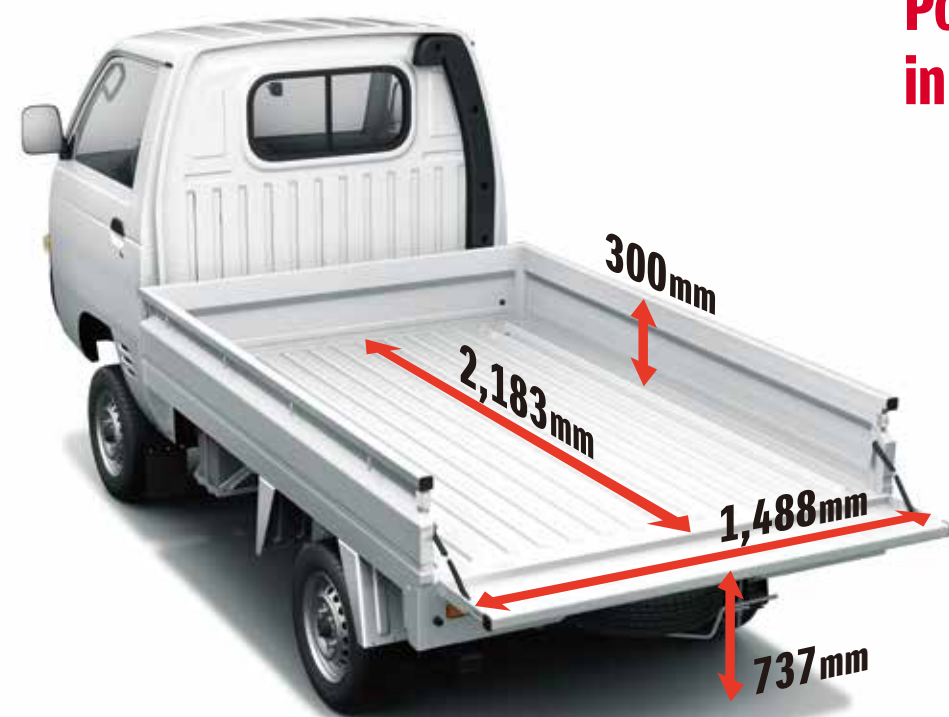


The all-new Suzuki Super Carry is the best partner for all your business needs. Its power comes from a robust engine with superior fuel economy. A range of features such as generous load space, durability and reliability combined with a functional cabin make Super Carry the new power player on the roads.

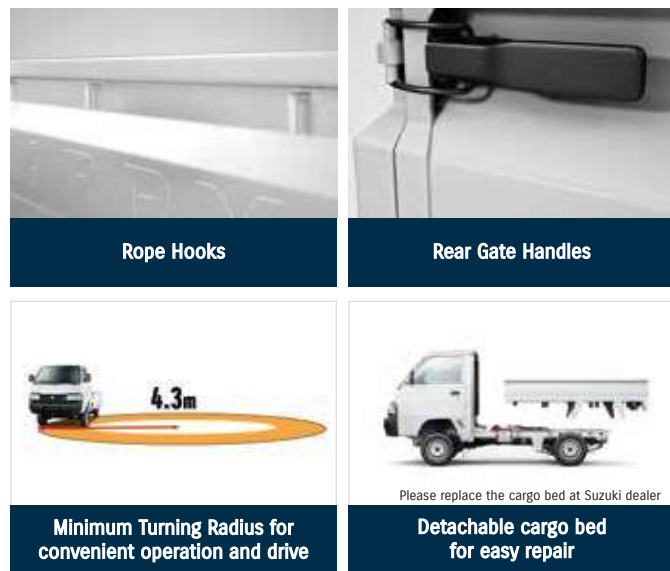

Power in various forms



The power of convenience.

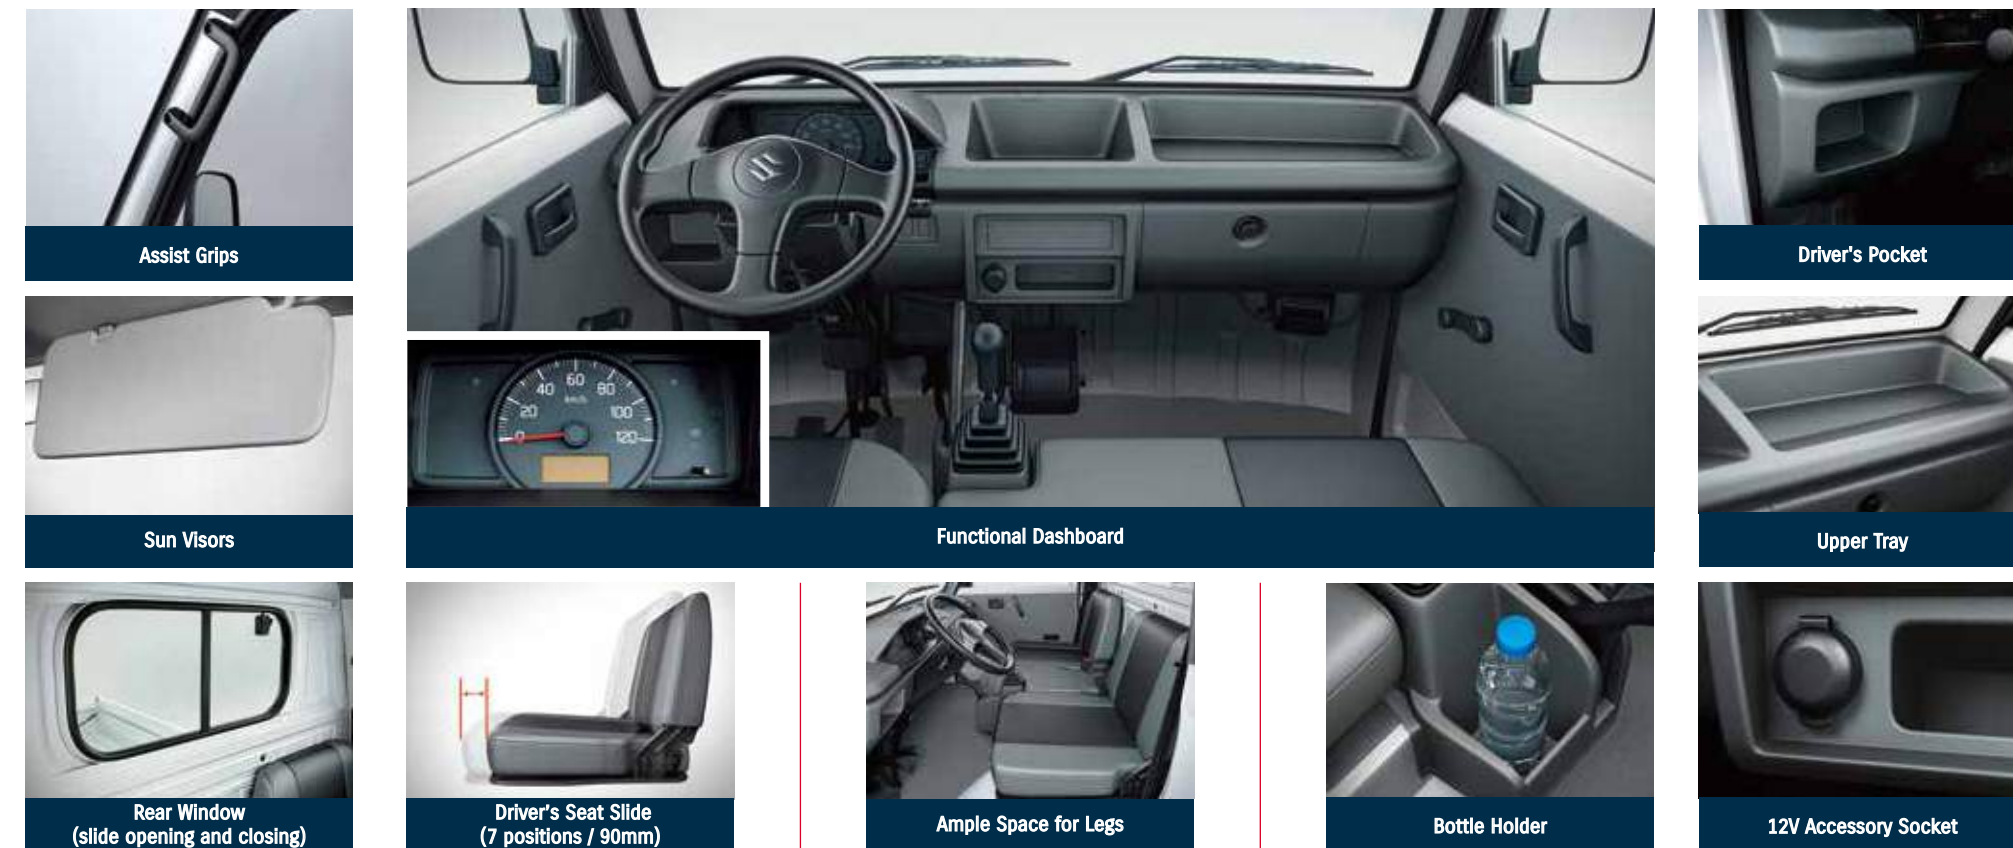

The real power performer.



DDiS
E08A diesel engine

1 0.8 DDiS

The newly developed E08A 0.8-litre diesel engine provides great performance with excellent fuel efficiency in a lightweight design. Featuring the turbocharger, it delivers outstanding power in acceleration, even at low engine speeds.

2 G12B 1.2-litre petrol engine

The 1.2-litre petrol engine combines dynamism with high fuel performance which contributes to the driver's business needs.

The power to master any road.

